

LED AREA LIGHTS - SMALL (XAS3)



US patents D598160, D598161 & 7828456 and CN patents 13006 & 13007 and MX patents 30416 & 30418 and US & Int'l. patents pending

SMARTTEC™ THERMAL CONTROL - Sensors in both optical unit and driver enclosure reduce drive current when ambient temperatures exceed 50°C. Current is lowered in imperceptible 5% increments every 5 minutes until safe operating temperature is reached.

EXPECTED LIFE - Minimum 60,000 hours to 100,000 hours depending upon the ambient temperature of the installation location. See LSI web site for specific guidance.

LEDS - Select high-brightness LEDs. 5800°K color temperature (nominal). 70 CRI (nominal).

DISTRIBUTION/PERFORMANCE - Types 2, 3, FT and 5. Exceptional uniformity creates bright environment at lower light levels. Improved backlight cutoff minimizes light trespass.

HOUSING - Die-formed aluminum. Weather-tight housing contains factory prewired driver and field connections. Wiring access door (with safety lanyard) is located underneath and utilizes tool-less thumbscrew fastener.

OPTICAL UNIT - Clear tempered optical grade flat glass lens sealed to aluminum optics housing creates an IP67 rated, sealed optical unit. Pressure stabilizing breather allows super-tight IP67 protection while preventing temperature cycling from building up internal pressures and vacuums that can stress optical unit seals and components. Optical unit lanyard serves dual purposes of safety and provides positive ground between unit and housing.

MOUNTING - Tapered rear design allows fixtures to be mounted in a quad pattern without the need for extension arms. Use with 3" reduced drilling pattern on our steel round and steel square poles. See separate data sheets. Wall mount available by ordering wall mounting bracket (see accessory ordering information).

ELECTRICAL - A terminal block for attachment of incoming primary wiring is supplied. Two-stage surge protection (including separate surge protection built into electronic driver) meets IEEE C62.41.2-2002, Scenario 1, Location Category C. Available with universal voltage power supply 120-277VAC (50/60Hz input), 347VAC and 480VAC. Optional twistlock photocell receptacle is available. Photocell must be ordered separately. Optional button-type photocells (PCI) are available in 120, 208, 240, 277 or 347 volt (supply voltage must be specified).

DRIVER - Available in multiple drive currents: 350mA, 450mA and 550mA (Drive currents are factory programmed). State-of-the-art driver technology designed specifically for LSI LED light sources provides unsurpassed system efficiency. Components are fully encased in potting material for IP65 moisture resistance. Driver complies with IEC and FCC standards. Driver can be easily accessed and removed without the use of tools.

OPERATING TEMPERATURE - -40°C to +50°C (-40°F to +122°F).

FINISH - Fixtures are finished with LSI's DuraGrip® polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling, and is guaranteed for five full years. Standard colors include bronze, black, platinum plus, graphite, satin verde green, metallic silver and white.

WARRANTY - LSI LED fixtures carry a limited 5-year warranty.

PHOTOMETRICS - Application layouts are available upon request. Contact LSI Applications Group at lighting.apps@lsi-industries.com

SHIPPING WEIGHT (in carton) - 26.8 lbs / 12 kg

LISTING - Listed to U.S. and International safety standards. Suitable for wet locations.

Crossover LED Lighting

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)	5201
Watts	75
Lumens per Watt (Efficacy)	69
Color Accuracy Color Rendering Index (CRI)	68
Light Color Correlated Color Temperature (CCT)	6320 (Daylight)

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: KGGN-GYAXZP
Model Number: XAS3 FT LED 63 350 CW CU
Type: Outdoor arearoadway fixture

LIGHT OUTPUT - XAS3						
	# of LEDs	Lumens (Nominal)				Watts
		Type 2	Type 3	Type FT	Type 5	
350 mA	63	4977	4922	5201	4423	75
450 mA	63	6347	5582	6276	5110	98
550 mA	63	6958	6181	7058	5622	122

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



ARRA
Funding Compliant

Fixtures comply with ANSI C136.31-2001 American National Standard for Roadway Lighting Equipment - Luminaire Vibration 3G requirements.

LED AREA LIGHTS - SMALL (XAS3)

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **XAS3 5 LED 63 350 CW UE MSV PCI277**





Prefix	Distribution	Light Source	# of LEDs	Drive Current	Color Temperature	Input Voltage	Finish	Options
XAS3 - LED Area Small	2 - Type II 3 - Type III FT - Forward Throw 5 - Type V	LED	63	350 - 350mA 450 - 450mA 550 - 550mA	CW - Cool White (5800°K nom.)	UE - Universal Voltage (120-277) 347-480	BLK - Black BRZ - Bronze GPT - Graphite MSV - Metallic Silver PLP - Platinum Plus SVG - Satin Verde Green WHT - White	Button Type Photocells PCI 120 - 120v PCI 208 - 208v PCI 240 - 240v PCI 277 - 277v PCI 347 - 347v PCR - Twistlock Photoelectric Control Receptacle ¹

Beam Spread	Single	0.8
D180°	1.7	
D90°	1.4	
T90°	2.3	
TN120°	2.4	
Q90°	2.7	


Description	Order Number
BKA-XBO-EC-6-CLR 6" Extension Arm	382136CLR
BKS-XBO-WM-* - CLR Wall Mounting Bracket	382132CLR
XAS3 2/3/FT/5 HSS8 - House Side Shield ^{2,3}	454586BLK
DVS - Direct View Shield (rear mount only) ³	390687CLR
X4RPP Round Pole Plate for 4" Poles	379967CLR
X5RPP Round Pole Plate for 5" Poles	379968CLR
PC 120 - Photocell for use w/ PCR option (120V) ⁴	122514
PC 208-277 - Photocell for use w/ PCR option (208V, 240V or 277V) ⁴	122515
PC 347 - Photocell for use w/ PCR option (347V) ⁴	159516
PC 480 - Photocell for use w/ PCR option (480V) ⁴	1225180

NOTES:
 1- Photocell must be ordered separately. See Accessories.
 2- Black only. Rear Mount.
 3- House side shield and direct view shield add to fixture EPA. Consult factory.
 4- Factory installed PCR option required. See Options.

DIMENSIONS

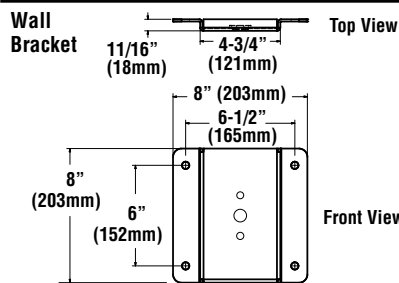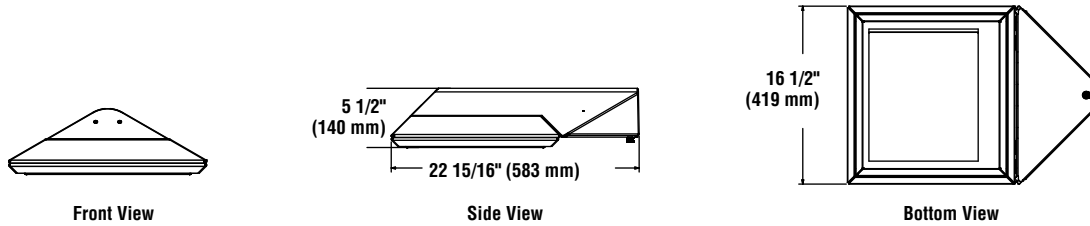

DVS - Direct View Shield (390687CLR)

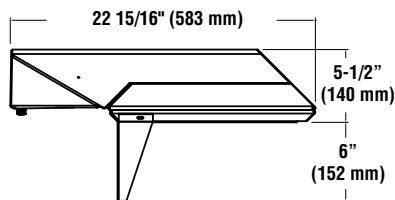

HSS8 - House Side Shield Types 2, 3, FT, 5 (454586BLK)

