

INSTALLATION AND ASSEMBLY INSTRUCTIONS

XA- & XR- HSS HOUSE SIDE SHIELD


WARNING: Risk of fire or electrical shock. Disconnect power before installing or servicing.

1. Kit includes Shield and (5) self-drilling screws. Do NOT use substitute screws!
2. Position Shield on the back of the Luminaire aligning slots in shield with holes in Luminaire.
NOTE: Shield can ONLY be mounted on BACK of luminaire (shield pointing towards pole)!
3. Secure Shield to Luminaire using (3) of the (5) supplied screws.

IMPORTANT - Do NOT allow Shield to hang from (1) screw - this will bend the Shield!

4. Align slots in Shield with holes in Luminaire towards the front and secure with (2) remaining screws. If no front holes are present, align Shield edge with side of Luminaire. Using a power drill and 5/16" hex driver, install both screws.

IMPORTANT - Do NOT drill additional holes in luminaire - this will void warranty!

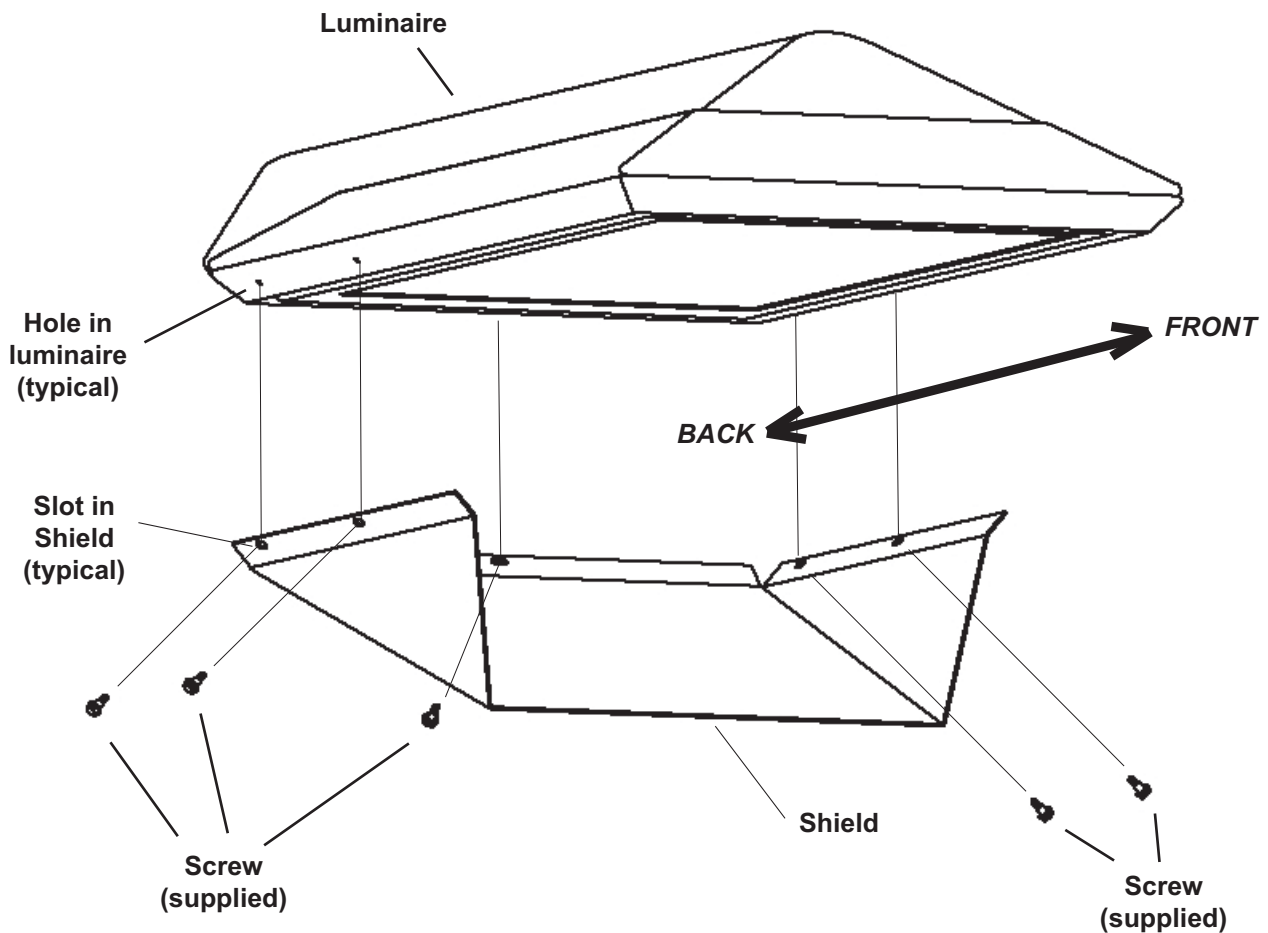

Installation Questions?
Call LSI Field Service Department at:
1-800-436-7800 Ext. 3300
Fax: 1-877-861-1368

