

CS/CSL - CONTEMPORARY SURFACE MOUNTED OUTDOOR EGRESS

HOUSING

- Die-Cast aluminum Housing
- UV Stabilized Polycarbonate Lens
- On LED Unit, ACEM unit switches on via integral photocell to provide nightly illumination backed by a 90 minute NiCad battery, if AC is removed
- Suitable for damp or wet locations (0°C to 50°C)

ILLUMINATION

- 11 Watt LED. 1080 lumens in AC mode. 260 lumens in emergency mode. 5000K
- (2) 6V 6 Watt Xenon lamps for EM mode.
- Optional LED Decorative Accent Lights with sensor in non-EM mode

BATTERY

- 6 volt Ni-Cad Battery Standard
- ETL Listed 90 minute run time. 24 hour recharge time.

ELECTRONICS



- 120/277 Dual Voltage with Test Switch
- SD2 Self Diagnostics is Standard
- Low voltage disconnect
- "CT" Option is Available for Cold Temperature Applications (-20°C-50°C)

MOUNTING

- Quick Connect Mounting Plate
- Universal J-Box Mounting Pattern

CODE CONFORMANCE & STANDARDS

- UL 94-5VA Flame Tested
- UL924
- NFPA 101
- NEC requirements

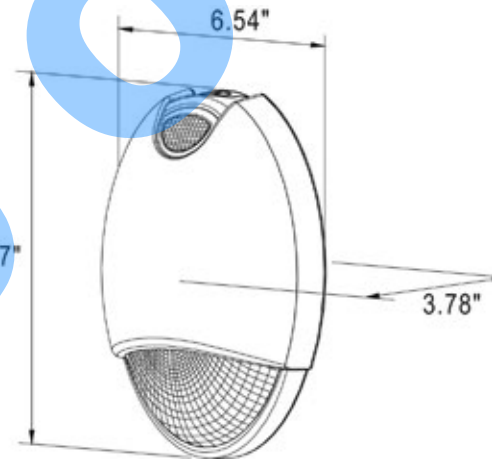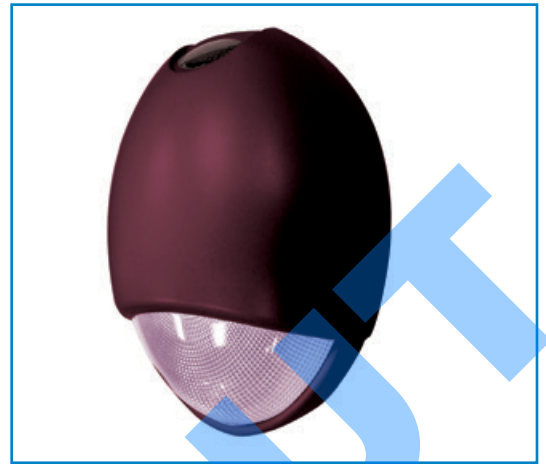

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **CS N DB CT**

Prefix	Battery	Color	Options
CS - Contemporary Surface	N-NiCad Battery EM Circuit Only	DB-Dark Bronze W-White BK-Black	CT- Cold Temp Operation GS-Green Accent & Sensor ² AS-Amber Accent & Sensor ²
CSL - Contemporary Surface LED	ACEM - AC and Emergency N - Emergency Only ¹	DB-Dark Bronze W - White SA - Satin Aluminum	BS-Blue Accent & Sensor ² WS-White Accent & Sensor ²

1- "N" unit operates only when AC power is removed. Integral photocell is not available on this fixture.
2- Not available with LED fixture.

