

Catalog # :

Project :

Prepared By :

Date :



LED FIXED HEAD J-BOX EMERGENCY LIGHT (EJF)



Features & Specifications

Optical System

- Fixed 2W 6 LED Head
- LEDs re-charge within 24 hrs

Electrical

- Standard Dual voltage (120/277 Vac) Input 60 Hz
- Standard Dual voltage (120/277 Vac) Input 60 Hz
- Sealed, maintenance-free nickel-cadmium battery provides 90 minutes of emergency power
- Typical LED life >10 years
- Provided with test switch and AC-On indicator
- Operating temperature: 10°C to 40°C (50°F to 104°F)
- UL 924 listed for damp location

Controls

- Optional passive infrared sensor (PIR) will activate when ambient light levels below 1.3FC are detected.
- Upon detection light will stay on for 15 minutes (AC) and then automatically turn off. The unit will automatically switch to emergency mode when AC power is lost
- Detection Range: 15 feet, 125° field of view

Construction

- White Injection-molded high-impact rated thermoplastic housing
- UV-stabilized, UL94 V-0 flame rated housing
- Snap together design for quick and easy installation
- Option of wall or ceiling mount
- Single pack shipping weight in carton: 1 lbs.
- Master carton quantity: 12pcs

Installation

- Designed for installation in 4" J-box
- Maximum Mounting Height: 6'
- Simple 2 screw installation
- J-Box box must have a minimum depth of 3" (Not Included)


Warranty

- Five full year warranty on electronics/battery and unit.

Listings

- UL924 Listed for Damp Location NFPA 101 and NFPA 70 OSHA
- NFPA 101
- NFPA 70-NEC
- OSHA

Product Dimensions

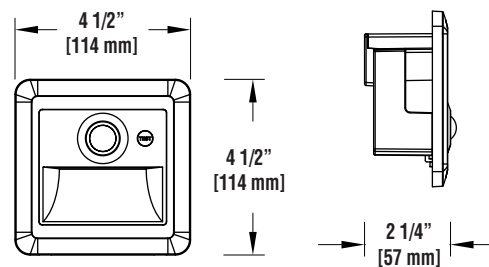

Ordering Guide

TYPICAL ORDER EXAMPLE:

EJF LED UNV WHT

Catalog Number	Description
EJF LED UNV WHT	LED Fixed Head J-Box Emergency Light, Dual Voltage 120/277V, White
EJF LED UNV PIR WHT	LED Fixed Head J-Box Emergency Light, Dual Voltage 120/277V, Passive Infrared Sensor, White

