

MR-16 THERMOPLASTIC EMERGENCY UNIT

EPM

HOUSING

- Impact Resistant Thermoplastic Housing
- Universal J-box Mounting
- Completely Self Contained
- Stylish Low Profile Contemporary Design
- Damp Location Rated

ILLUMINATION

- Fully Adjustable 5 watt Halogen MR-16 Heads

BATTERY


- Maintenance Free 6 Volt Lead Acid Battery Standard
- Lead Acid Batteries can provide up to 10 years of Life at 65° F through 85° F
- 90 Minute Run Time

ELECTRONICS


- Low voltage Disconnect
- AC Lockout
- Brown-out Protection
- 120-277 Volt Rated
- SD2 Option Available

CODE CONFORMANCE & STANDARDS


- UL 924 N.E.C, OSHA, N.F.P.A. 101, 70
- ETL Listed
- Meets State of Minnesota Energy Requirements (under 20 watts)

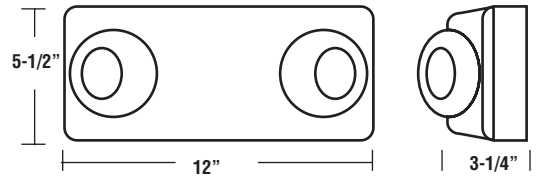

SPACING GUIDES

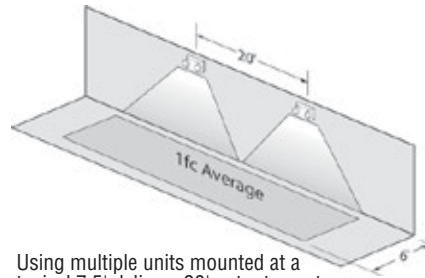

Using multiple units mounted at a typical 7.5' delivers 20' enter to center spacing on a 6' wide egress path.

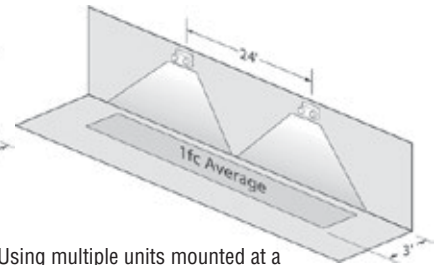

Using multiple units mounted at a typical 7.5' delivers 24' center to center spacing on a 3' wide egress path.

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **EPM SD2**

Prefix	Options
EPM - 6 VOLT 5 WATT HEADS	SD2-Self Test / Self Diagnostics BH- Black Housing



Project Name _____ Fixture Type _____
 Catalog # _____

10/09/15
 © 2015
 LSI INDUSTRIES INC.