


EPR - WET LOCATION - LOW PROFILE EMERGENCY

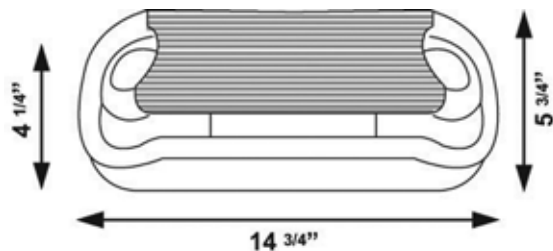

HOUSING

- Fully Gasketed Fiberglass Enclosure
- Wet Location Listed
- Resistant to Corrosive Atmospheres, Non-Hazardous Dust
- Resistant to Water Spray, Splashing Water, or Hose Down.
- Sealed Test Switch
- UV Stabilized Polycarbonate Cover
- Standard Finish is Gray

ILLUMINATION

- Fully Adjustable 7.2 Watt Halogen MR-16 Heads with 100 Lumen output per head

BATTERY

- Maintenance Free 6 Volt – Lead Calcium Battery Standard
- Lead Acid Batteries can provide up to 10 years of Life at 14° F through 104° F
- Optional Battery Heater (-10°C- 14° F)
- 90 Minute Run Time. 24 Hour Recharge Time.

ELECTRONICS

- Low voltage Disconnect
- AC Lockout
- Brown-out Protection
- 120-277 Volt Rated

CODE CONFORMANCE & STANDARDS

- UL 924 N.E.C, N.F.P.A. 101



ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **EPR** **WG**

Prefix	Options
EPR - 6 VOLT 7.2 WATT HEADS	WG - Wire Guard (see chart) BH - Battery Heater



Project Name _____ Fixture Type _____
 Catalog # _____

10/09/15

© 2015
 LSI INDUSTRIES INC.