

Catalog # :

Project :

Prepared By :

Date :



LED Emergency Remote Head,  
2 Heads, Round Head, White

LED Emergency Remote Head,  
1 Head, Round Head, White



LED Emergency Remote Head,  
2 Heads, Square Head, White







LED Emergency Remote Head,  
1 Head, Wet Location Head, White

## LED REMOTE HEAD EMERGENCY LIGHTS (ERH)



### Product Dimensions

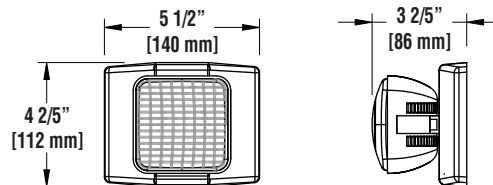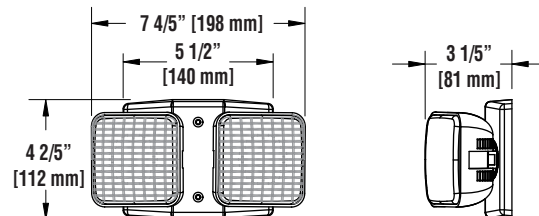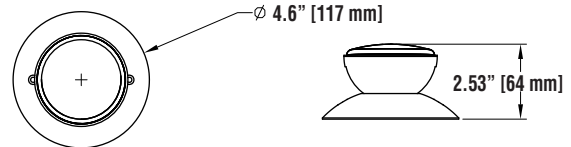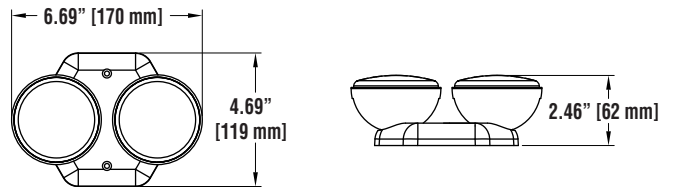

### Features & Specifications

#### Optical

- Each lamp head is used as part of an emergency lighting system (See Table)
- Each lamp head is fully adjustable and glare-free

#### Electrical

- Typical LED life >10 years
- Operating temperature damp location heads: 20°C to 30°C (68°F to 86°F)
- Operating temperature wet location heads: 10°C to 40°C (50°F to 104°F)
- Each lamp head is used as part of an emergency lighting system (See Compatibility Table)

#### Construction

- Single or Double remote lamp head with mounting base
- Heads for both indoor and outdoor applications
- White Injection-molded high-impact rated housings
- UV-stabilized, UL94 V-0 flame rated housing

#### Warranty

- Five full year warranty on electronics/battery and unit.

#### Listings

- UL924 Listed for Damp Location
- NFPA 101
- NFPA 70-NEC
- OSHA

### Ordering Guide

TYPICAL ORDER EXAMPLE: **ERH LED 2 WHT**

Catalog Number	Description
ERH LED 2 WHT	LED Emergency Remote Head, 2 Heads, Round Head, White
ERH LED 1 WHT	LED Emergency Remote Head, 1 Head, Round Head, White
ERH LED 2 SQ WHT	LED Emergency Remote Head, 2 Heads, Square Head, White
ERH LED 1 WL WHT	LED Emergency Remote Head, 1 Head, Wet Location Head, White
ERH LED 2 WL WHT	LED Emergency Remote Head, 2 Head, Wet Location Head, White

