

# EWV - WET LOCATION / VANDAL RESISTANT EXIT

## FEATURES

- Self Diagnostics - Self Test Feature Standard
- Tamper Resistant Hardware Standard with Maintenance Tool Included
- Optional Battery Heater Available for Extreme Low Temperature Applications, Expanding Operating Temperature Range to -40°C – 45°C
- Fixture may be built to comply with the ARRA Act of 2009 and Buy American Provisions, consult factory.

## HOUSING

- IP66 RATED NEMA 4X .420 Thick Die-Cast Aluminum
- High Impact, UV Stabilized Polycarbonate Lens.
- Designed for Extreme Duty
- Removable Chevrons
- Perfect for Public areas where Outdoor / Vandalism is a Concern
- Damp, Wet, and Hose Down Location Rated

## ILLUMINATION

- LED Illuminated Red or Green Exits

## BATTERY


- 6 Volt Ni-Cad Standard for 90 Minute Operation
- Optional 120 Minute Ni-Cad Battery is Available

## ELECTRONICS

- Low voltage Disconnect
- AC Lockout
- Brown-out Protection
- 120-277 / 347 Volt Rated

## CODE CONFORMANCE & STANDARDS

- UL 924 N.E.C, N.F.P.A. 101
- CSA Listed

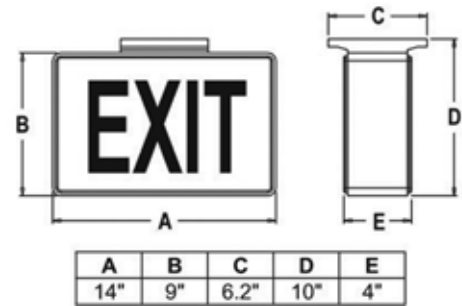

## ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **EWV R 1 LB WH RPK12**

Prefix	Letter Color	Number of Faces	Battery	Housing	Options
EWV	R - Red G - Green	1 - Single 2 - Double	LB-Less Battery AC Only WB-With Battery Ni-Cad Only	WH - White  BK -Black	RPK12-12" Pendant Kit FL - Flasher AA - Audible Alarm BH - Battery Heater ( Specify:120 Or 277) XNB-Ni-Cad Battery With 120 Min Run Time Capacity US - Meets Buy American Requirements 2CI - 2 Circuit Input (specify voltage 120 or 277) <sup>1</sup>

<sup>1</sup> - LB Only. For use with generator or inverter applications only.

