


# EX - LED EXIT



## DIMENSIONS

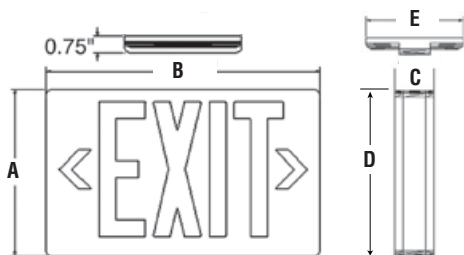

	A	B	C	D	E
EX	7.5"	12.75"	1.75"	8.5"	4.8125"
EX-R6	8"	12"	2"	9"	4.8125"
EX-R12	10"	13.75"	2.75"	11"	4.8125"
EX-R27	10"	13.75"	2.75"	11"	4.8125"

## HOUSING

- Two sizes: Standard & Remote
- Injection Molded UL924 VO Flame Rated Thermoplastic
- Snap together Design
- Universal Face Design
- Damp Location Rated
- Replaceable Chevron Arrows
- Available in White or Black
- Fixture may be built to comply with the ARRA Act of 2009 and Buy American Provisions, consult factory.

## ILLUMINATION

- L.E.D. source - available in long life, high output red or green
- Fully illuminated 6" letters with 3/4" stroke
- Low energy consumption with 2 watt red or 1 watt green LEDs

## ELECTRONICS

- 120/277 Dual voltage
- Overload & short circuit protection
- Voltage surge & brown-out protection
- Solid-state constant current charger

## BATTERY

- 6 Volt Ni-Cad Battery Standard on Non-Remote Units
- 6 Volt Lead Calcium Standard on Remote Capable Units
- R6 remote capacity option will power up to (4) PRLED remote heads only
- All Battery Options Fully Contained within the Fixture

## MOUNTING

- Universal Mount with Canopy
- Universal J-Box Mounting Pattern

## SELF-TEST/SELF-DIAGNOSTIC OPERATION (SD2)

- The circuit continuously monitors the operating condition of the AC power, battery supply voltage, emergency lamp continuity and charging circuit.
- If a failure is detected, visual status will occur immediately via the multi-colored LEDs. LED indicator(s) will illuminate until fault has been corrected.
- The SD2 also monitors the transfer circuit as well as performing automatic code compliant testing. The self-test will operate the equipment in emergency mode five minutes every 28 days. Also, a 90 minute full-function test is performed every six months.

## CODE CONFORMANCE & STANDARDS

- UL 924 on Emergency Units
- N.E.C.
- OSHA
- N.F.P.A. Life Safety Code 101
- ETL listed 90min. run time/12 hr. recharge time

Wire guard available. Order separately. See wire guard chart in Accessories section.

## ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **EX R U WB WH SD2**

Prefix	Letter Color	Number of Faces	Battery	Housing	Options
EX - Exit Sign	R - Red G - Green	U - Universal (includes 2 face plates, back plate and mounting canopy)	<b>LB</b> -Less Battery <b>WB</b> -With Battery	WH - White BK - Black	SD2-Self Test / Self Diagnostics (not available on remote capable units) <sup>1</sup> R6-6 Watts Remote Capacity <sup>3</sup> PK1-1' Pendant Kit PK2- 2' Pendant Kit PE12- 12" Pendant Extension 2CI- 2 Circuit Input (not available on remote capable units) PG-polycarbonate guard (see chart) US - Meets Buy American Requirements SF - Special Sign Face <sup>4</sup>

1 - Not available without battery (LB) option.  
2 - Not available with R12 or R27 option.

3 - Will power up to (4) PRLED Remote Heads only.  
4 - Not compatible with remote capable option.