

LED RECESSED WALL WASH RETROFIT KIT(NWWK)

PRODUCT HIGHLIGHTS

- Long Life, high brightness LED's virtually eliminate maintenance
- RoHS compliant, recyclable "green" design contains no mercury or other hazardous materials
- Cooler running electronic components allow for improved lumen performance.
- Wall wash unit provides uniform illumination of vertical surfaces/displays

EXPECTED LIFE - Projected life of at least 60,000 hours. Contact factory for TM-21 detail.

LEDS - Use of closely spaced medium-power, high brightness chips minimizes pixilation and provides uniform lens luminance. Available in Cool White (5000K), Neutral White (4000K) and Warm White (3500K) color temperatures. CRI >= 80 (CW > 70). LM80 reports available.

INSTALLATION - Kit is designed for installation into existing LSI NWW fixtures. All components can be installed from below the ceiling.

ELECTRICAL - Universal voltage (120-277 Vac) Input 50/60 Hz, 347 Vac. Power factor > 0.9, THD , 20%, in-rush current < 15 Amps

DRIVER - High-performance isolated driver features over-voltage, over-current and short-circuit (with auto-recovery) protection. Driver module is sealed to IP66 protection levels, with a Class A sound rating. 0-10 volt dimming standard.

FINISH - All metal parts are painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with matte white, high-reflectance (minimum 92%) polyester powder.

WARRANTY - Limited 5-year warranty


PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

LISTING - Listed to UL 1598 and UL 8750. Suitable For Damp Locations.


This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



DIMENSIONS

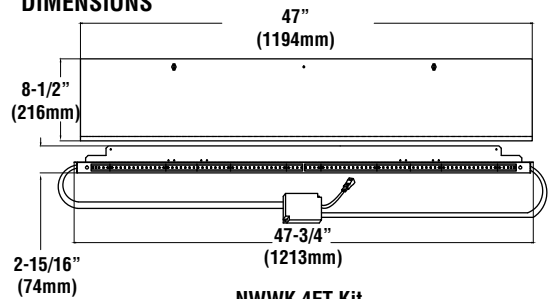

NWWK 4FT Kit



NWWK 2FT Kit

	SS - Super Saver			HO - High Output			Watts	
	WW	NW	CW	WW	NW	CW	SS	HO
NWW 2FT	1340	1400	1630	2815	2960	3415	14	28
NWW 4FT	3355	3475	4000	4095	4305	4950	36	46

LED Chips are frequently updated therefore values may increase.

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **NWWK 4 LED HO NW UE EM**

Prefix	Length	Light Source	Lumen Output	Color Temperature	Line Voltage	Options
NWWK - Led Wall Wash	2 - 2 foot 4 - 4 foot	LED	SS - Super Saver HO - High Output	CW - Soft White (5000K) NW - Neutral White (4000K) WW - Warm White (3500K)	UE - Universal Electronic (120-277V) 347-347V	EM - 1100 Lumen Emergency SD50 - Step Dimming to 50%



Project Name _____ Fixture Type _____
Catalog # _____