


# LED OFFSET STRIP RETROFIT KIT

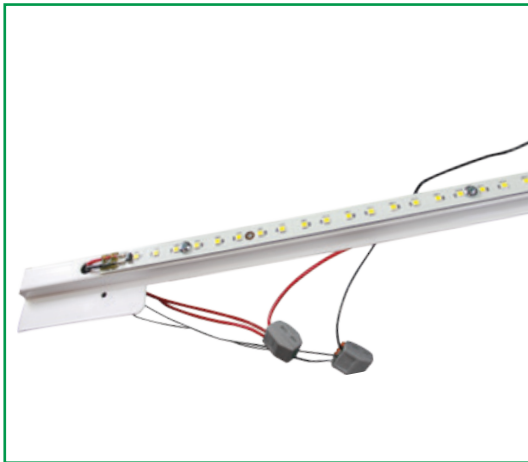

## PRODUCT HIGHLIGHTS

- Simple, quick changeover from fluorescent to LED.
- Unit designed to be retrofitted into single lamp linear fluorescent surface mounted staggered strip fixtures. See installation instruction for mounting details and compatibility.
- Long life, high brightness LEDs virtually eliminate maintenance.
- Available with up to 6129 lumens (8FT CW)

**EXPECTED LIFE** - Projected life of at least 60,000 hours. Contact factory for TM-21 detail.

**LEDS** - Use of closely-spaced medium-power, high-brightness chips minimizes pixilation and provides uniform luminance. Available in Cool White (5000K), Neutral White (4000K), and Warm White (3500K) Color temperatures. CRI >=80 (CW < 70). LM-80 reports available.

**CONSTRUCTION** - Bracket constructed of 22 gauge steel with a high-reflectance (minimum 92%) white polyester powder coat finish

**DRIVER** - High-performance isolated driver features over-voltage, over-current and short-circuit (with auto-recovery) protection. Driver module is sealed to IP66 protection levels, with a Class A sound rating. 0-10 volt dimming standard.

**ELECTRICAL** - Universal voltage (120-277 Vac) input, 50/60Hz. Power factor > 0.9, THD < 20%, in-rush current < 15 Amps.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.

**WARRANTY** - LSI LED fixtures carry a limited 5-year warranty.

**LISTING**- UL Classified to 1598 and UL 8750, Coated Boards Are Suitable For Damp Locations.


LIGHT OUTPUT - LED OSK		
	HO - High Output	Watts
	CW	HO
OSK 2	1810	14
OSK 4	3805	28
OSK 6	4865	35
OSK 8	6310	44

LED Chips are frequently updated therefore values may increase.

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



## DIMENSIONS

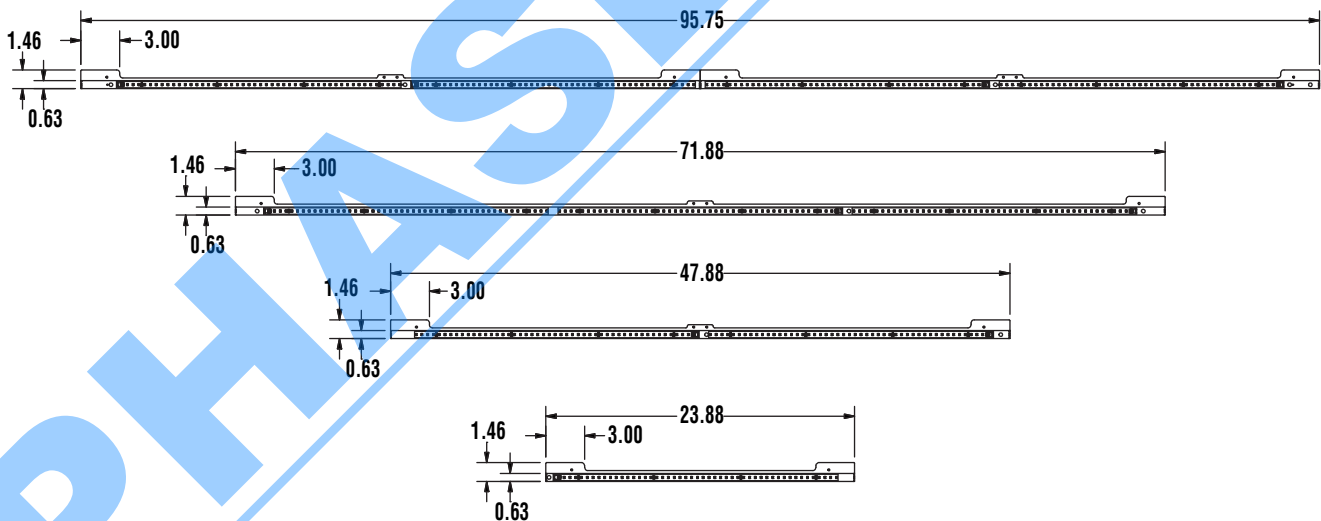

## LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **OSK 4 LED HO CW UE**

Prefix	Length	Light Source	Output	Color Temperature	Line Voltage
OSK	2 - 2 foot 4 - 4 foot 6 - 6 foot 8 - 8 foot <sup>1</sup>	LED	HO - High Output	CW - Cool White NW - Neutral White WW - Warm White	UE - Universal Input Voltage (120-277V)

1 - For 8 foot fixture with (2) 4 foot lamps, use (2) 4 foot units.



Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_  
Catalog # \_\_\_\_\_

12/14/15  
© 2015  
LSI INDUSTRIES INC.