


RGE

RECESSED DIRECTIONAL "GIMBLE RING" DOWNLIGHT

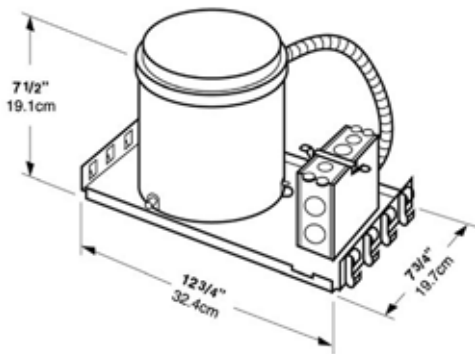

HOUSING

- Durable Steel Housing and Trim Ring
- Trim Ring is Standard Powder Coat White
- Light weight Aluminum Gimble Assembly.
- Damp Location rated

ILLUMINATION

- Adjustable 8 Watt Halogen Lamp

BATTERY

- 6 Volt Lead Calcium Battery Standard

ELECTRONICS

- 120/277 Dual voltage 60Hz
- Overload & Short Circuit Protection
- Voltage Surge & Brown-out Protection
- Fully Automatic Temperature Compensating Charger
- Momentary Test Switch

MOUNTING

- T-Bar or Sheet Rock Ceilings

CODE CONFORMANCE & STANDARDS

- UL 924
- N.E.C.
- N.F.P.A. Life Safety Code 101
- ETL 90 Minute Run Time
- 24 Hour Recharge Time

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **RGE 6 8 WH**

Prefix	Battery	Voltage	Wattage	Color
RGE	BLANK - Pure Lead	6 - 6 Volt	8-8 Watt	WH - White BK - Black



Project Name _____ Fixture Type _____
 Catalog # _____

10/09/15
 © 2015
 LSI INDUSTRIES INC.