

Catalog # :

Project :

Prepared By :

Date :



SRK4 Retrofit LED Strip

The retrofit SRK is designed with toolless entry features saving time and money on installation. A factory installed optional bracket can be field adjusted to fit existing housings. Optimizing industry leading LED technology, the SRK series delivers unparalleled performance and efficiency meeting stringent energy requirements. The luminaire delivers high vertical illumination offering 3000K, 3500K, 4000K and 5000K color temperatures. Innovative programmable drivers offer expansive lumen packages and comes standard with 0-10V dimming down to 1%. Designed with uncompromised aesthetics, the high-performance luminaire is well suited for commercial, industrial, retail and residential applications.

Features & Specifications

Optical System


- Use of closely spaced medium-power, high brightness chips minimizes pixilation and provides uniform lens luminance.
- Available in 5000K, 4000K, 3500K, and 3000K color temperatures per ANSI C78.377. Consult Factory for other color temperature requirements.
- Minimum CRI of 80.

Electrical

- Class 2 high-performance programmable driver features short circuit, open circuit protection for LED + and LED - and temperature foldback. Driver complies with FCC standards.
- 0-10 volt dimming (1% - 100%) standard.
- Standard Universal Voltage (120-277 Vac) input 50/60Hz. Optional high voltage 347 Vac Input available, consult factory for lead time and DLC qualification information. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products list at www.designlights.org/QPL to confirm which versions are qualified.
- L70 Calculated Life: >60k Hours @ 25°C per IESNA TM-21-11. (See Lumen Maintenance on Page 2)
- Total harmonic distortion: <20%
- Power factor: >.90
- Input power stays constant over life.
- Optional (120-277V) integral 10 watt battery backup is available. The 90-minute batteries provide constant power to the LED system. The fixture delivers 1300 lumens during emergency mode. A test switch/indicator button is installed on the LED board panel for ease of maintenance.



Dimensions

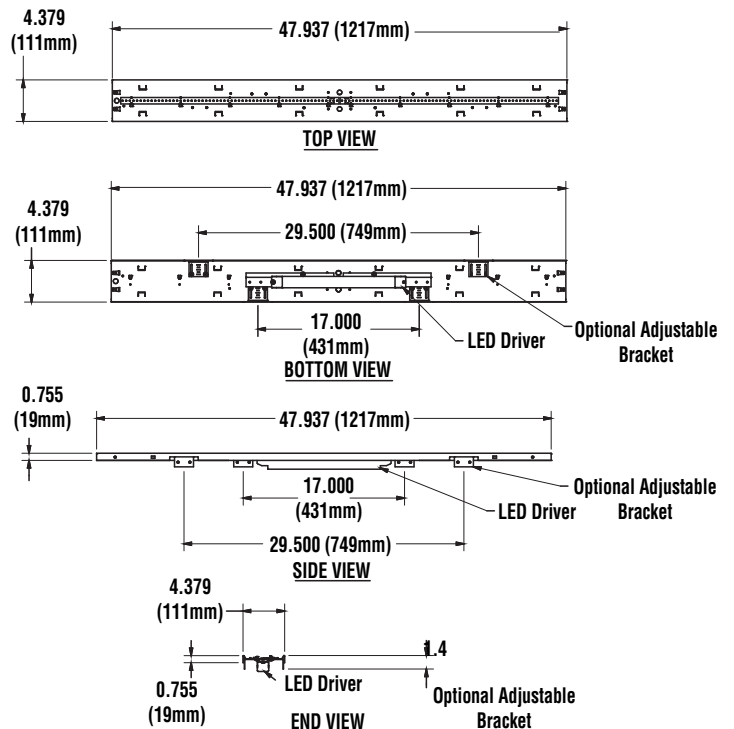



Features & Specifications (cont.)

Construction

- Rigid housing is die-formed 22-gauge cold rolled steel for consistency and strength.
- Luminaire is proudly manufactured in the U.S of U.S. and imported components.
- Luminaire is painted after fabrication following treatment with phosphate rust inhibitor. Finish coat of housing is high reflectance white (minimum 92%) polyester powder.
- Shipping weight: 9 lbs

Installation

- Suitable for retrofitting fixtures.
- Remove existing components i.e. fluorescent lamps, sockets, ballasts.

Warranty

- LSI LED Fixtures carry a 5-year warranty.
- 1 Year warranty on optional Battery Backup. Test regularly in accordance with local codes.

Listing

- Listed to UL 1598 and UL 8750 for 25°C Ambient applications
- RoHS Compliant.
- American Recovery and Reinvestment Act Funding Compliant.
- Suitable For Damp Locations.

Photometry

- See website for IES and photometric files

Performance

SRK4 ELECTRICAL DATA (Amps)*				
Lumen Package	120V	208V	240V	277V
20L	0.12A	0.07A	0.06A	0.05A
30L	0.17A	0.10A	0.09A	0.08A
40L	0.23A	0.13A	0.12A	0.10A
50L	0.30A	0.17A	0.15A	0.13A
60L	0.34A	0.20A	0.17A	0.15A
70L	0.40A	0.23A	0.20A	0.17A
80L	0.47A	0.27A	0.23A	0.20A

*Electrical data at 25C (77F). Actual wattage may differ by +/-10%.

Recommended Lumen Maintenance ¹						
LUMENS	AMBIENT TEMP C	INITIAL ²	25K HR ²	50K HR ²	75K HR ³	100K HR ³
40L	25C	98%	97%	95%	94%	92%
80L	25C	99%	96%	94%	92%	91%

Specifications and dimensions subject to change without notice.

- 1 - Lumen maintenance values at 25C are calculated per TM-21 based on LM-80 data and in-situ testing.
- 2 - In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times the IESNA LM-80-08 total test duration for the device under testing
- 3 - In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times the IESNA LM-80-08 total test duration for the device under testing

*LED chips are frequently updated therefore values are subject to change.



Performance (cont.)

SRK4 DELIVERED LUMENS*										
LUMEN PACKAGE	CRI	3000K CCT		3500K CCT		4000K CCT		5000K CCT		WATTAGE
		DELIVERED LUMENS	EFFICACY	DELIVERED LUMENS	EFFICACY	DELIVERED LUMENS	EFFICACY	DELIVERED LUMENS	EFFICACY	
20L	80	1973	137.0	1969	136.7	2014	142.8	2156	149.7	14.1
30L	80	3017	144.4	2944	140.8	3011	144.1	3223	154.2	20.9
40L	80	4013	144.9	3919	141.4	4005	144.6	4287	154.8	27.7
50L	80	5046	142.5	4923	139.1	5036	142.3	5391	152.3	35.4
60L	80	6103	149.6	5955	146.0	6091	149.3	6520	159.8	40.8
70L	80	7035	148.1	6864	144.5	7021	147.8	7516	158.2	47.5
80L	80	8079	145.1	7883	141.5	8063	144.8	8631	155.0	55.7

*LED chips are frequently updated therefore values are subject to change.

Luminaire Ordering Guide

TYPICAL ORDER EXAMPLE: **SRK4 LED 40L UNV DIM1 35 80CRI**

Family Size	LED Gen	Lumen Package	Lens	Voltage	Driver	Color Temp	CRI	Controls	Options	Packaging
SRK4 - 4' Strip	LED	20L - 2000 30L - 3000 40L - 4000 50L - 5000 60L - 6000 70L - 7000 80L - 8000 *Consult factory for programmable wattages and lumen packages	(Blank) - None	UNV - 120-277v 347 - 347V ¹	DIM1 - Dims to 1%(0-10V) SD50 - Step dimming to 50% ²	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K	80CRI - 80 CRI	(Blank) - None	(Blank) - None EM10 - 10W Battery Backup (1300 Lumens) ADJ - Adjustable Bracket	(Blank) - Single Pack

NOTES:

1. Consult factory for leadtime & DLC qualifications.
2. Not available with 347V



Adjustable Bracket (Optional)

- Investigate/measure existing fixture already installed
- If fixture measures 4.25" - 2.00" wide, the adjustable bracket is required for retrofit installation
- The adjustable bracket will be preinstalled at the factory and can be field adjusted by moving the brackets inward/outward to fit existing housing.

