


BRITESTRIPE™

Utilizing solid state LEDs (Light Emitting Diodes), BriteStripe is an innovative accent lighting system, which replaces neon borders or perimeter lighting. BriteStripe is easy to install and requires virtually no maintenance.

- Energy savings - up to 90% over neon or fluorescent lamps
- Extremely long life - up to 100,000 operating hours (11 years of constant power on or 20 years average life)
- Highest low voltage - 24 volt system enhances performance and longevity. Ensures fire and health safety as compared to neon.
- Continuous illuminated color without “hot spots” and “shadows”
- Easy to install - new construction and retrofits. Quickly snaps into place on the mounting buttons secured on the mounting surface.
- Rugged waterproof construction - eliminates breakage during shipping and installation
- Weather resistant - operates in low and high temperature environments

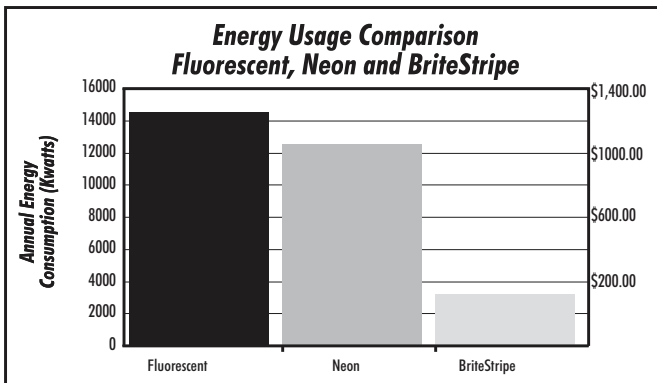

SPECIFICATION SUMMARY	
Color	Red, amber (orange), yellow green, blue, white
Lens Material	Modified Acrylic, UV and hydrocarbon stable
Voltage	24VAC
Power Supply Input Voltage	110VAC / 277VAC
Connections	Waterproof
Mounting System	Easy snap-on buttons
Lengths Available	2', 4', 6', 8', 10'
LED Size	1.8mm x 2.8mm
Capacity per Power Supply	60 feet
Sealed Units	yes
Mitered Corners Available	yes
Radius Units Available	yes (vertical & horizontal)
UL Approved (Power Listing)	UL48 (UL Listed Class II) Wet Location
Operating Temperature	-40°F to 167°F (-40°C to 75°C)
Power Used (watts/ft.)	2.88
Luminous Efficiency (fL/W)	59 (Red)
Limited Warranty	Red, amber (orange), yellow - 5 years Green, blue, white - 3 years
Life	Up to 100,000 hours* *Life varies according to color selected.



BRITESTRIPE™

ORDERING INFORMATION


Each BriteStripe package is precisely tailored for your site. Contact your local LSI Representative with a building or canopy plan showing where you want to place the BriteStripe and we'll take it from there.

Each job is shipped complete with appropriate lengths of BriteStripe, power supplies (120 or 277V), hook-up cable, mounting buttons, spare end caps and adhesive, jumper wires and installation instructions.


BRITESTRIPE POWER CONSUMPTION (RED)		
	Neon 12kv, 30mA	BriteStripe 24VAC
Power per Foot	9.6 w/ft.	3.0 w/ft.
Typical Installation	300'	300'
Total Power	2.88 kw	.900 kw
12 hrs/day x 365 days	12,614 kwh	3,942 kwh
Cost per Year @ \$.12/kwh	\$1,534	\$473
Savings per Year	-	\$1,061 (70%)

INSTALLATION

Installs easily on both bullnose and flat fascias.

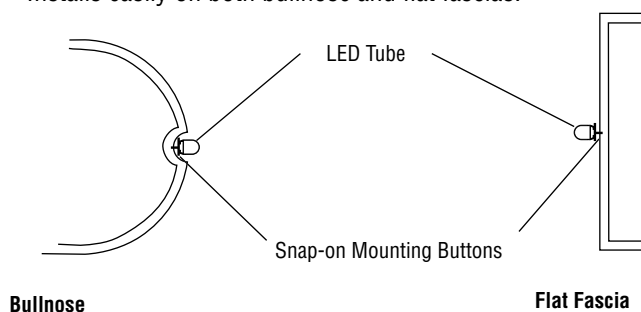

Easy daisy-chain connection of supply power.

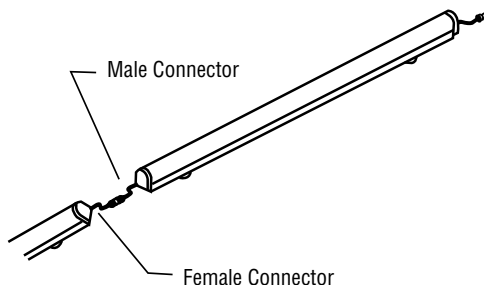

All lengths can be cut to custom size in the field.

